


Valid only at time of printing

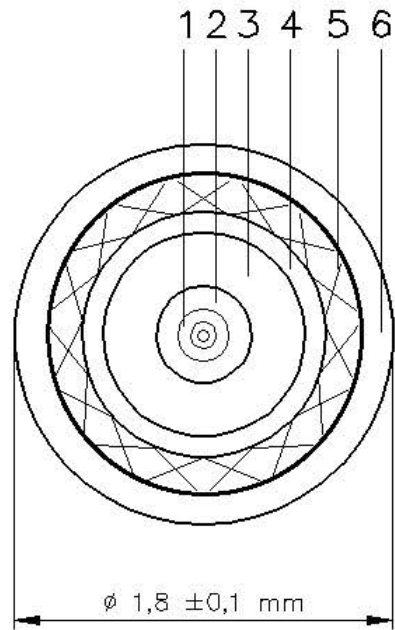


Construction

- | | |
|-----------------------------------|-------------------------|
| 1. Optical Fibre | 9/125/245 |
| 2. Buffer material | ePTFE |
| 3. Sheath material colour | Thermoplastic natural |
| 4. Buffer material | ePTFE |
| 5. Braided Strain Relief material | Aramid Fiber |
| 6. Jacket material colour | Fluoropolymer see table |

<i>Ident-no.</i>	<i>Product-no.</i>	<i>Colour</i>
GSC-13-84689-04	138468904	yellow
GSC-13-84689-07	138468907	violet

Characteristics

Operating temperature range	-55°C to +125°C
Weight	4 g/m max.
Tensile strength	150 N max.
Optical Loss	max. 1,4 dB/ km at 1310 nm max. 1,4 dB/ km at 1550 nm

Ersatz für / Replacement for		Ersetzt durch / Replaced by		Formular Beschreibung / Description	
				Benennung / Description FIBER OPTIC SIMPLEX CABLE	
B	12.02.16	SH	9451		
A	05.12.14	SH	-		
Revision	Date	Author	PLFECO no.		
 W. L. GORE & ASSOCIATES GMBH Nordring 1 • 91785 Pleinfeld • Germany Tel. +49 9144 6010 • Fax +49 9144 6816 gore.com				Identnr. / Ident No. GSC-13-84689-00	
				Seite / Page 1/1	