


Valid only at time of printing

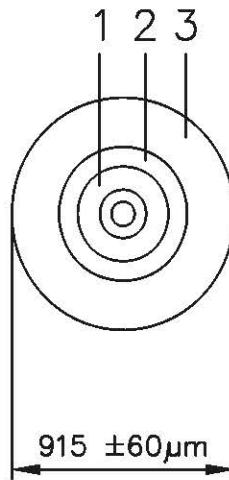


Construction

- | | |
|-----------------------------|-----------------------|
| 1. Optical Fiber, multimode | 9/125/245 |
| 2. Buffer material | ePTFE |
| 3. Sheath material colour | Thermoplastic natural |

Characteristics

- | | |
|-----------------------------|--|
| Operating temperature range | -55°C to +125°C |
| Weight | 0,85 g/m |
| Optical Loss | max. 1,4 dB/km at 1310 nm max. 1,4 dB/km at 1550 nm |

| | | | | | |
|---|----------|-----------------------------|------------|-------------------------------------|--------------|
| Ersatz für / Replacement for | | Ersetzt durch / Replaced by | | Formular Beschreibung / Description | |
| | | | | Benennung / Description | |
| | | | | FIBER OPTIC CABLE 900 - SM | |
| A | 06.09.17 | SH | - | | |
| Revision | Date | Author | PLFEKO no. | | |
|  W. L. GORE & ASSOCIATES GMBH Nordring 1 • 91785 Pleinfeld • Germany Tel. +49 9144 6010 • Fax +49 9144 6816 gore.com | | | | Identnr. / Ident No. | Seite / Page |
| | | | | GSC-13-85375-00 | 1/1 |